



HURACAN SUPER TROFEO TECHNICAL REGULATIONS 2021

CARS ADMITTED

1. Lamborghini Huracan Super Trofeo EVO or updated vehicle with official "EVO Kit".

GENERAL PRINCIPLES

2. Anything not expressly authorized by these regulations or by the Technical Documentation is prohibited. The official Lamborghini Technical Documentation including Spare Parts Catalogue, Wiring Diagrams, Workshop Manual and Technical Bulletins, has to be considered as reference for what is not specified in the Technical Regulations and on the Technical Form.

The only operations, which may be carried out, are those necessary for routine maintenance or for the replacement of worn parts or those damaged through accident. It is expected that each entrant will dispose of all the equipment in order to perform these operations. The limits to the modifications and to the assemblies allowed are specified in these regulations. Unless provided by these authorizations, any part altered through wear or accident may only be replaced by a part of identical origin to the damaged piece. Additions to parts or materials are forbidden unless expressly authorized by these regulations or by the Form or by the Technical Bulletins, and by the official Technical Documentation.

Competition Cars must always follow the specifications of the components to be used and their correct assembly provided by the following references:

- I. Technical Form and Technical Passport;
- II. Technical Manual;
- III. Spare Parts Catalogue;
- IV. comparison with series characteristics, latest construction designs and categorically up-to-date as per Technical Bulletins.
- V. Identification by anti-counterfeiting stickers or RFID

The Competitor is responsible for the conformity of the Car and the parts assembled therein, and is therefore obliged to ensure that they are in order before each race.

SPARE PARTS

3. The Competitors are authorized to use only original spare parts provided by Lamborghini. The use of non-official spare parts without the official Lamborghini sign, will result in penalties or disqualification of the competitors.

The Lamborghini Technical Scrutineers are able and allowed to check at any time all the spare parts, and in no case the competitors can refuse from these checks.

MINIMUM WEIGHT

4. Minimum weight:
The Lamborghini Huracan Super Trofeo cars, including their safety devices and all the lubricants (excluding the fuel), must weight no less than 1270 Kg (excluding the driver).
The minimum weight of the car equipped with muffler exhaust is 1280 kg.
Checking of weights may be carried out:
 - a) After the official qualifying session
 - b) After the races

It's important to remind that the car must end all the qualifying sessions and the races with at least 3 liters of fuel which is not included into the minimum weight mentioned above.


MINIMUM HEIGHT

5. Minimum Height

No sprung part of the car (chassis, bodywork, mechanical parts, etc.) is permitted lower than the underfloor. In no case shall the vehicle touch the ground when all tires are deflated.

At any time, it must be possible to check the static minimum height of the car which shall be not less 75mm, measured at the positions shown below

Front ride height through the line below:

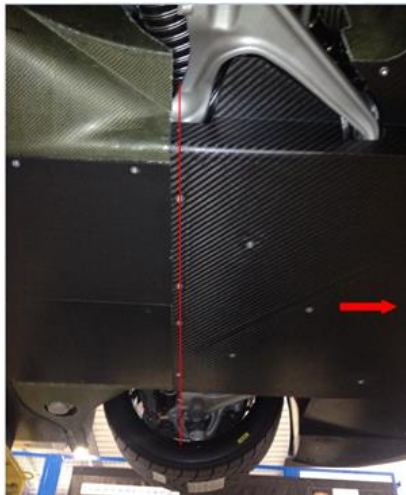

Rear ride height through the line below:



For the ride height check the reference tire pressure is 1.8 bar (26 PSI).

This measurement is carried out on the official Lamborghini flat patch.

Checking of height may be carried out:

- a) After the official qualifying session
- b) After the races

Lamborghini will inform the competitor in case of any other modification needed to the heights.

ENGINE

6. The engine must be strictly standard.

For this reason all the engines are sealed directly by Lamborghini on both heads (camshaft driving covers & camshaft covers) and on the bottom side (Oil sump), in that way no work can be carried out.

Nobody either Entrant, Competitor, Team or Dealer are allowed to carry out any kind of maintenance work on the engine.

Only Lamborghini is allowed to carry out maintenance work on the engine.

In case of failure the engines have to be sent directly to Lamborghini still sealed.

The Competitors are not allowed to compete in the event if the documentation and seals do not conform to the rules.

Lamborghini reserves the right to check the conformity of the seals on the engine at any time.

The retouching of any part of the engine is prohibited; material may not be removed or added unless permitted by these Regulations, Technical Form or Bulletins.

During the weekend of the races Lamborghini, in agreement with the Technical Scrutineers, reserves the right to replace or check at any time the ECU (electronic control unit) dedicated to the engine/gearbox management system or check the conformity of the SW of the ECU.

To avoid problems and non-authorized changes or modification to the engine, Lamborghini will collect and collate the engine serial number with the chassis number of each vehicle.


For any maintenance or replacement operation, involving the sealing removal, the competitor will have to compile the proper claim form. (please refer to the specific Bulletin).

WARRANTY: engine used in competition are not covered by any warranty.

Engine must run with the specific air restrictor (2x41mm diameter 4TA129640) that has been recorded by ACI SPORT.

All the air feeding the engine must go through the air restrictors.

The following air intake section must be respected:

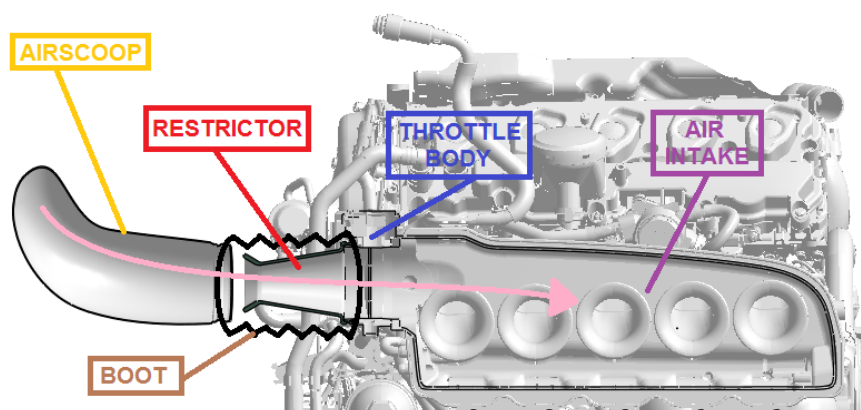

During the official events (race) weekend Lamborghini reserves the right to check the air intake system by "stall test".



ELECTRICAL SYSTEM

7. The socket for connecting diagnosis equipment must always be functioning and accessible at any time for all the ECUs.

External data logging systems are permitted only if connected to the standard "FIA IC" CAN connector available in the car.

The engine management ECU access is forbidden to the teams.

The official technical scrutineers and the Lamborghini Squadra Corse technicians are allowed to download and check engine management data at any time.

The acquisition table in the data logger must be the original one indicated by Lamborghini. Only the official customizable functions (i.e. Shift lights, logging time, sensor zeroing) can be modified by the team

GPS system is permitted only using the supplied one by Lamborghini.

It is possible to adopt linear potentiometers on the suspension components, ride height sensor and TPMS only as supplied by the official Lamborghini Spare Parts catalogue.

Installation of a system that allow communications between driver and team crew (i.e. Radio or Mobile Phone) is compulsory.

Headlights, Rear lights and rain lights must be working properly during the entire Event.

Supplementary colored lights for recognizing the cars in the pit lane are allowed only for the night race events and they have to be installed inside the front windshield area.

Others electrical/electronic systems should be used but must be connected only at the power supply (no CAN connection). Position and safety fixing of the devices must be checked and approved by the official technical scrutineers and the Lamborghini Squadra Corse technicians.

GEARBOX / TRANSMISSION

8. The gearbox must be the one prescribed by Lamborghini and therefore must be strictly original.

In case of repair after a failure or for a standard maintenance, if you chose to send the gearbox to Squadra Corse technicians (please refer to the specific Bulletin).

The teams can also do the gearbox/differential repair or maintenance job individually using the original Lamborghini components as listed in the Spare Parts catalogue.

Differential must be original and also the internal part mounting must be standard.
Ramps angles must be 30° power and 45° brake as indicated in the official technical sheet.

Differential pre load torque must be maximum 60 Nm as indicated in the official technical form (pag. 40) measured minimum after 30 minutes the end of the race or qualifying session.

Lamborghini reserves the right to check the conformity of the gearbox and differential at any time.

The retouching of any part of the gearbox/differential is prohibited; material may not be removed or added unless permitted by these Regulations, Technical Form or Bulletins.



SQUADRA CORSE

To avoid problems and non-authorized changes or modification to the gearbox, Lamborghini will collect and collate the gearbox serial number with the chassis number of each vehicle.

WARRANTY: gearbox used in competition are not covered by any warranty

WHEELS / TYRES

9. Only the supplied and available on track (by Pirelli) tires, slicks or rain, in the following sizes are allowed:

Front slick: 305/645-18 DHA
Rear slick: 315/680-18 DHA

Front rain: 305/645-18 WH
Rear rain: 315/680-18 WH

The official technical scrutineers and the tire supplier technicians are allowed to control at any time that tire pressures are in compliance with the official Pirelli requirements.

Only the standard aluminum rims supplied by Lamborghini in the following dimensions are allowed:

Front: 11" x 18 ET 28,8mm
Rear: 12" x 18 ET 32mm

It is mandatory to have at least 3 wheel sets for each car for easy mounting tires during the events.

Under no circumstances the Camber shall exceed the maximum values of:

Front: 0° up to -3,0°
Rear: 0° up to -3,0°

Camber adjusting is permitted within the above limits by adding and removing the official Lamborghini shims (0,3 mm - 0,5 mm - 1 mm) positioned only between chassis and upper suspension arm (on both axles).

Lamborghini reserves the right to modify these values according to the circuit.

This measurement is carried out on the official Lamborghini flat patch.

BRAKE SYSTEM

10. Only the following parts are permitted:

- Front steel brake discs TM 380x35mm EV08 (4TA615029A + 4TA615030A),
- Rear steel brake discs TM 355x32mm (4TA698302C + 4TA698601C),
- Lamborghini Bosch Motorsport ABS M4,
- Mono block Brembo 6 pots front caliper (4TA615105 + 4TA615106),
- Mono block Brembo 4 pots rear caliper (4TA615405 + 4TA615406),
- Brake bells (4TA698211A + 4TA698219B) and drive pins (4TA601116 or 4TA698545)
- Front Brake Pads TM Compound SE (4TA615415)
- Rear Brake Pads TM Compound SE (4TA615416)
- Brake master cylinders by AP Racing allowed by user manual (pag 158) and technical sheet,

Brake parts without official Lamborghini codes clearly visible are NOT ACCEPTED at any time.



Only original brake cooling intakes/pipes are allowed and only in the positions specified in the user manual and the technical form.

In the brake pedal system only one of the two different (long/short) brake drop link supplied by Lamborghini must be used (4TA721743 or 4TA798109).

The official technical scrutineers and the Lamborghini Squadra Corse technicians are allowed to control the conformity of the braking system at any time.

SHOCK ABSORBERS

11. Only the original Ohlins TTX-36 (2 way) shock absorbers (4TA412019 + 4TA512019) as described in the Official Technical Form (pag. 51) must be used.

The dampers must comply with the configuration released by Lamborghini concerning the hydraulics and bump stop.

It is not possible to remove, add, cut or modify the bump stop that must respect the original shape:

Front Bump Stop



Rear Bump Stop



The official technical scrutineers and the Lamborghini Squadra Corse technicians are allowed to verify the shock absorbers and / or need to be replaced with other guaranteed by the manufacturer any time during the event.



PIPES/WIRING/HEATING SHIELD AND PROTECTIONS

12. The arrangement of all the components must remain as per the original layout and/or as per official Technical Bulletin from Lamborghini.

CAR BODY / INTERIOR

13.
 - a) Pedals: the brake and accelerator pedal surfaces may be customized but changes should not pose a threat to safety in any way.
All the pedal surfaces modifications must be approved by the Lamborghini technical delegates and scrutineers.
 - b) Left side footrest removal or modification **ARE NOT ALLOWED**.
 - c) At least one video camera fixed inside the cockpit and pointed on the track in front of the car is mandatory. Position and safety fixing of the devices will be checked by Official Scrutineering.
 - d) Anti-roll Bars stiffness can be adjusted only using the official available configurations.
Is it also possible to disconnect the anti-roll bars (front and/or rear) but all the parts (i.e. drop links) must remain on the car.
 - e) Lamborghini does not allow the installation and the use of a passenger seat in the Lamborghini Super Trofeo official events.

The use of the second seat is only permitted during private testing.
It won't be possible to participate at the event with the second seat on board.

The Competitors are not allowed to modify the brackets and/or the fixing points of the seat, which at all times must be in the original condition and/or in the available positions.

- f) Only one spacer can be used directly between the steering wheel and the quick release system. Only spacers and screws provided by Lamborghini can be used (400419589 or 4TA898038).
 - g) No part of car body may be improved, modified or material added. All parts must correspond in size, appearance and material to the originals. The original position of car body parts may not be altered, **no** adhesive tape affixed **on** bonnets, bumpers or doors, etc., modified to improve the car's aerodynamics.

On the Super Trofeo cars is allowed to install the left and right side head restraint nets which comply with SFI 37.1 or FIA 8863-2013 but they must be checked and approved by the official technical scrutineers and the Lamborghini Squadra Corse technicians.

- h) The use of EVO body kit will be mandatory and fully assembled in the car following the user manual supplied by Lamborghini.

FUEL

14. All the cars must use only the same allowed fuel with 98 RON or the fuel supplied by Lamborghini during the event. No other type of fuel or additive are allowed.

During each race upon fueling a sample may be taken to make comparative tests on the fuels used by the competitors during practice sessions and/or the race itself. Lamborghini will transport the fuel samples, taken by the Technical Scrutineers in the presence of the Competitor or his representative, to the test labs.

LUBRICANTS

15. All Competitors must only use the following lubricants for the related parts, namely:

Engine Oil:	CASTROL EDGE SPORT 10W60 PERTAMINA FASTRON 10W60
Gearbox Oil:	CASTROL SYNTRAX LONGLIFE 75W90 or PERTAMINA 75W90
Brake System Oil:	CASTROL SRF or BREMBO HTC64T
Hydraulic Power Steering Oil:	LIQUI MOLY ATF III
Cooling system:	WATER+ 5% WATER WETTER

In events with climatic conditions at high temperatures is recommended to use Water plus Water Wetter for better cooling.

During the Series events, lubricant samples can be taken for testing. All the cars, in order to be allowed to start the race, need to have all the lubricants reaching the full (high) level, and/or the level recommended by Lamborghini. The Technical Scrutineers will be in charge of this checking process, and at no time shall the Competitor try to avoid them.

SAFETY DEVICES

16. The car fully complies with the APPENDIX J (Article 277) of the International Sporting Code concerning the safety devices:

Brake system safety	(253-4)
Circuit breaker	(253-13)
Fuel tank FT3-1999, pipes, pumps and filter	(259-6.3 253-3.1 253-3.2 253-3.3 253-3.4 257A-6.3 259-6.4)
Carburant	(252-9)
Oil catch tank	(259-7.4)
Electric cables	(259-8.5)
Safety belts	(259-14.2.1)
Reverse gear	(275-9.3)
Suspension arm	(275-10.3.1 275-10.2)
Wheel material	(275-12.2)
Extinguisher	(253-7)
Rear view mirror	(253-9)
Rear light	(259-8.4.2)
Headrest	(259-14.4)
Towing eye	(259-14.6)
Firewall	(259-16.6)
Windscreen	(259-3.6)
Windscreen wiper	(259-3.6)
Roll cage	(253-8)
Seat	(253-16)
Roll cage padding	(253-8.3.5)
Ground clearance	(252-2.1)

All the aforementioned safety devices must be original.



Cutting the Roll cage paddings **IS NOT ALLOWED** for any reason.

Customizing the seat position is allowed only using the original holes in the brackets and in the seat. Modification of the brackets or creating a new holes are not permitted for any reason.

Changing the number and the position of the nozzles and fire- extinguisher is not permitted.

During any track session the wearing of the HANS® device is compulsory. Use of the HANS® device must comply with and follow the contents of Appendix L, Chapter III, art. 3 of the FIA Code.

For more details please refer to the "Guide for the Use of HANS® in International Motor Sport", published by the FIA Institute for Motor Sport Safety, the information can be found on www.fia.com, under the heading FIA Sport - Regulations - Driver's Equipment.

The team is responsible for the correct maintenance and validity of the safety devices.

FT3-1999 FUEL SYSTEM

17. The Lamborghini Super Trofeo cars must equip the complete system including:

- FT3-1999 rubber fuel tank with internal foam (the total capacity with the foam is 118 L);
- 4 lift pumps and main fuel pump installed + a nourice (6l capacity);
- The internal fuel system layout Including fuel hoses and specific connections;
- The external fuel system made of special fuel hoses with metallic protection and Ergal connections;
- The electrical wiring loom (fuel resistant);
- 1 fuel tank flange with non-return flap valve FIA homologated;
- 1 fuel tank flange with gravity activated roll-over valve;
- 1 ventilation/breather valve 200mbar homologated by FIA;
- 1 cut- off 'quick disconnect' connector;
- 2 safety filler necks;
- 2 refueling and ventilation plastic bottles;
- Carbon Fiber Protective Fuel Tank Case;
- 2 fuel sample/ and fuel tank drain connector;
- 1 automatic cut off valve

- a) All FIA certifications released to the team must be kept and will be object of inspection during the Lamborghini Super Trofeo official events. The FIA fuel tank homologation must be always visible in order to allow the necessary validity inspections;

IMPORTANT


Please note that the FT3- 1999 has a validity of 5 years from the date of manufacture indicated on the fuel tank. At the end of 5 years will be required:

- Revise the tank (by the manufacturer) with the extension of validity for 2 years;
- Or
- Replace the tank.


- b) It is not permitted to perform any kind of modification to the FT3 fuel system;
- c) Lamborghini does not allow the use of non-certified materials and not conforming to the FT3 fuel cell;
- d) It is strictly forbidden to carry out any modification to the components of the original refueling system;
- e) All the teams must comply with the installation procedures supplied by Lamborghini;

Here below find the two options of fuel system scheme:


SPEC.1

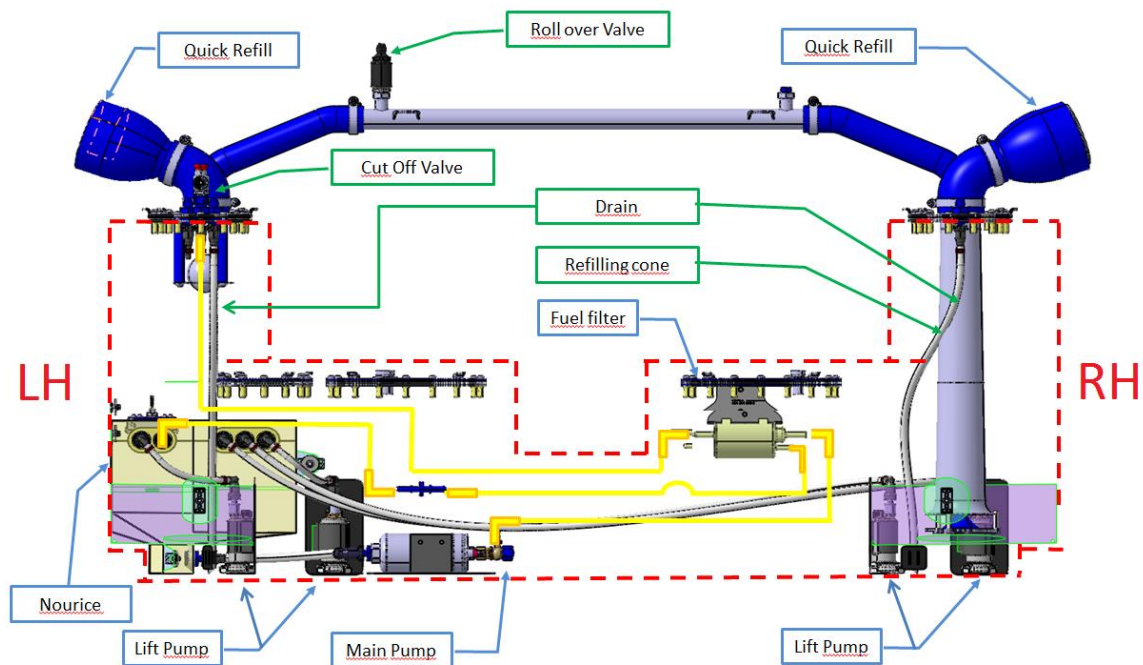

SPEC.2

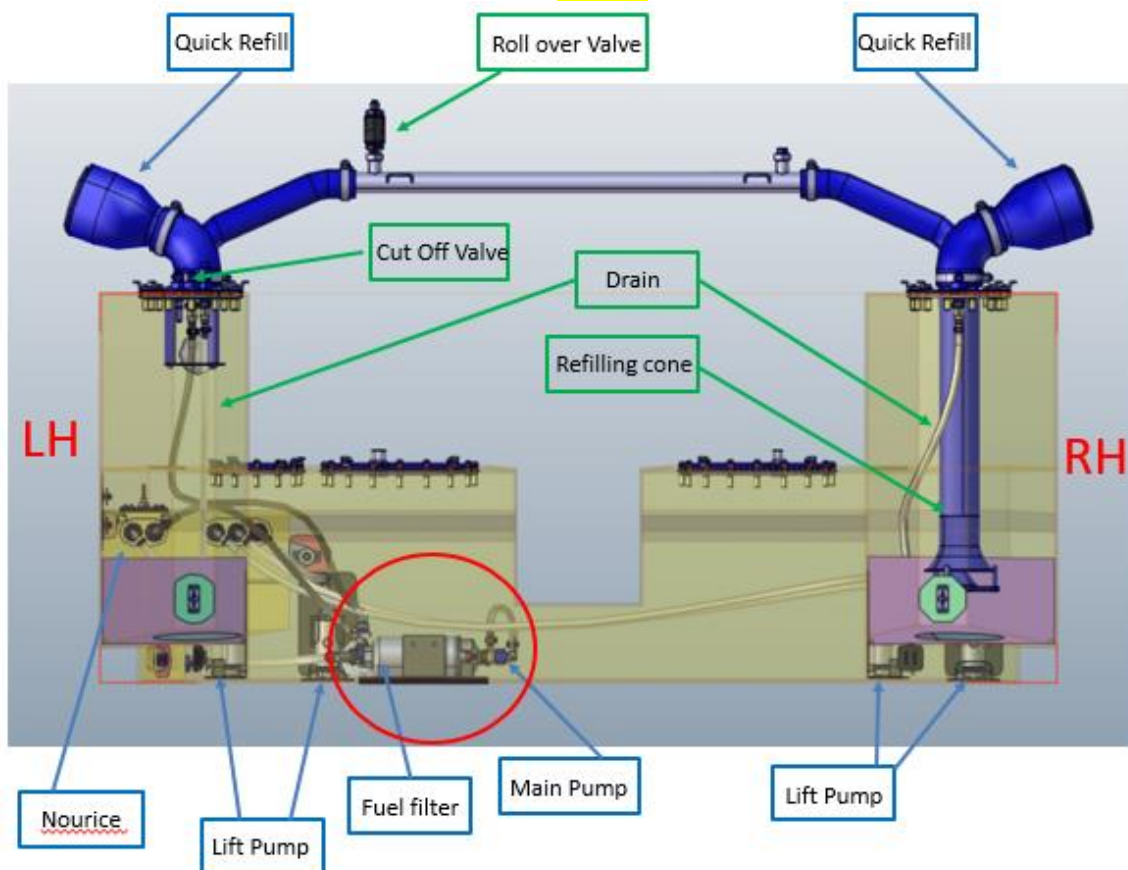

Main pump & fuel filter scheme (SPEC.2):

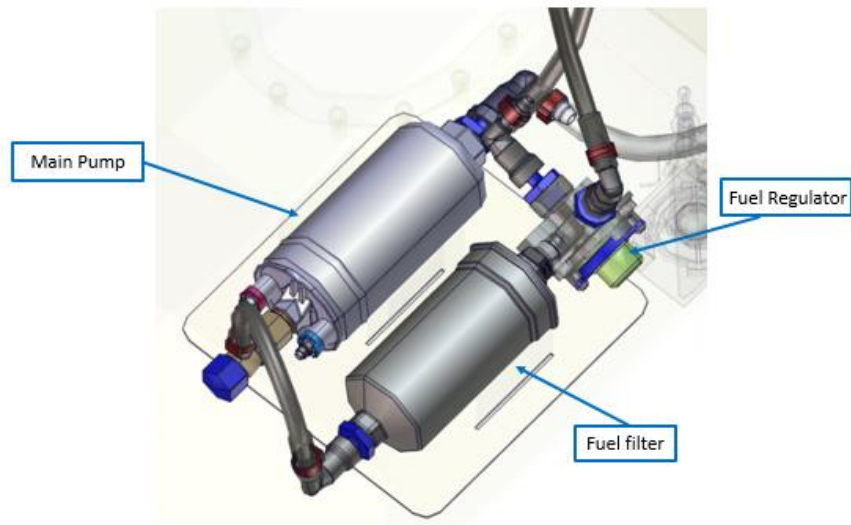

FINAL DIRECTIONS

18. Lamborghini reserves the right to change any clause and regulations herein at any time to ensure the successful outcome of the Lamborghini Super Trofeo.